

Vertical Bore Cladding System (VCS) with HW-GTAW


Available for Rent,
 Lease or Purchase

Red-D-Arc's Vertical Bore Cladding System (VCS) is designed to perform fully-automated GTAW build up of corrosion-resistant metal components such as subsea christmas tree assemblies. The VCS package is a complete turnkey system that includes a KEY 1250 PLC system controller with touch-screen control weld-data-documentation recording software, a remote control pendant, a 500 or 700 amp pulsed-TIG power source, a 150 amp Hotwire TIG power source, motorized vertical and horizontal cross slides mounted on a heavy duty manipulator, a 15-ton capacity floor-mounted turntable with closed-loop drive and a secondary encoder for position feedback. The system also includes an integrated wire feeder and cladding torch with integrated wire-feed guide.



Specifications

Model	RDA VCS 700
Weld Process	Hotwire TIG (HW-GTAW)
Manipulator	RDA HD VCS 10x13 with heavy-duty motorized cross-slides
Turntable	6 foot diameter table, 15 ton capacity with slip ring
Standard Power Source	Miller Maxstar 700 with Coolmate 3.5 cooler, Maxstar 200 DX
Optional Power Source	Other power sources are available
Maximum Height Bore Depth	Up to 2000 mm depending on torch type and vertical slides used
Minimum Weldable Bore Diameter	45 mm
Water Cooled TIG Torch	Various fixed and adjustable-angle torch heads available
Welding Speed	20 cm/min to 45 cm/min
Control	KEY 1250 PLC Controller
Control Functions	Controlled by 15 in TFT HMI or remote pendant
Input Power RDA VCS 700	VCS (controller, manipulator, turntable) - 380 to 480 V, 3 phase, 50/60 Hz
Input Power Miller Power Sources	Maxstar 700 and Maxstar 200DX - 380 to 480 V, 3 phase, 50/60 Hz
Input Power Miller Cooler	Coolmate 3.5 - 115 VAC 50/60 Hz (from power source)
Overall Height	5500 mm
Shipping Weight	9550 kg complete system

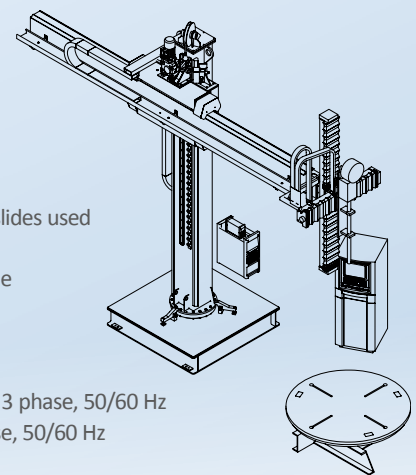

CE 3year warranty

Red-D-Arc Welderentals rents and sells welding and weld-positioning equipment - around the world.

**Vertical Bore Cladding System (VCS)
 with HW-GTAW**

